



## TECHNICAL DATA / FEATURES

- dimensions: 156x92x85
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: standard
- light distribution angle: 46° x 15°
- IP rating: IP55
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- built-in connectors: -
- other (optional): handle  
switch  
PC seal



## ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.





Mounting: as a freestanding on body panels. They shall be installed in an upright position.

The wiring runs through the length of the mounting bolt.

Do not use over 55W bulbs if the lamp is equipped with polycarbonate lens.

It is possible to install needed connectors on wire (on request).

## DIMENSIONS

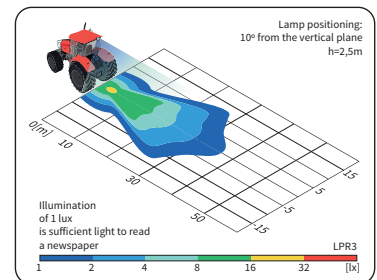

Cat. number	Type	H3	Lens material	glass	plastic	Accessories	bulb H3 12V	bulb H3 24V	handle	switch	cable 0,15 m	Bracket	shank	Mounting method	installed vertically up	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Packaging / pc	blister pack
<b>LPR3.15762</b>	✓	✓	✓	✓							✓	✓	✓	✓	✓						1
<b>LPR3.29462</b>	✓	✓	✓	✓						✓	✓	✓	✓	✓	✓						1
LPR3.15764	✓	✓	✓	✓			✓		✓	✓	✓	✓	✓	✓	✓						1
<b>LPR3.21362</b>	✓	✓	✓	✓					✓	✓	✓	✓	✓	✓	✓						1
LPR3.18962	✓	✓	✓	✓			✓		✓	✓	✓	✓	✓	✓	✓						1